



HIGH-CEILING INSTALLATION

Floor-Anchored configuration accommodates high ceiling washrooms.

**1030 TrimLine™ Series
P-Lam Toilet Partitions With
Stainless Steel Edge Trim**

Design Accent and Edge Protection

Durable Plastic Laminate Surfaces

Industrial Grade Particle Board

Steel-Core Reinforced Stiles

TrimLine™ Series Defends Against:

Dents, impacts and edge damage in heavy-use and abuse public washrooms.

Scratching, gouging.

Paint and marker ink. Graffiti cleans without ghosting.

Corrosion and structural failure.

**Flame spread and smoke development. Has ICC, NFPA Class B
ASTM E 84 test result classification.**

Install in vandal-prone institutional, retail and foodservice washrooms.
35 RapidResponse™ colors; 10-day order fulfillment.

1030 TRIMLINE™ SERIES PLASTIC LAMINATE TOILET PARTITIONS

Standard Features



MATERIAL

Doors, stiles and panels: 1" (25mm) thick, 3-ply, 45-lb density, impact-resistant particle board construction; scratch-, graffiti- and corrosion-resistant .050" (1mm) thick, plastic laminate surfaces; laminate routed for a flush fit of stainless steel edge.



CONCEALED HARDWARE

Heavy-duty, type 304 satin-finish stainless steel; for emergency access, door lifts from outside. Hinge can be adjusted for a partial opening or self-closing door; patented, one-piece shoe conceals stile leveling device.

Optional Features




.65 OPTION FULL-HEIGHT HARDWARE

All configurations. Extra-heavy-duty, type 304 satin-finish stainless steel; angle brackets, U-channels and spring loaded, self-closing hinge run full height of panels and doors; for emergency access, door lifts from outside; all fasteners are Pin-in-Head Torx Screws; patented, one-piece shoe conceals stile leveling device. To specify, add .65 suffix to Series Number.



STILE BASE, LEVELING DEVICE

11-gauge steel core welded to 3/8" x 7/8" (10 x 22mm) steel leveling bar, forming a single structural unit. Furnished 3/8" (10mm) diameter, stainless steel wedge floor anchors require minimum 2" (51mm) penetration into minimum 3" (76mm) thick structural concrete floor.

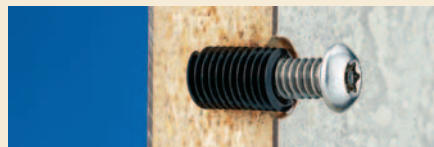

THREADED INSERTS



T-NUTS

Threaded inserts are factory installed for securing hinges. Vandal-resistant, Pin-in-Head Torx Screws for mounting all hardware; saves installation time and costs. T-nuts are factory installed for securing door latch.



OCCUPANCY INDICATOR DOOR LATCH

Through-the-door stainless steel construction with red-green occupancy indicator, and emergency access feature. Available on special order.

DESIGNER'S NOTE:

Per ASTM E 84 tests: 1030 Series, Flame Spread Index 60, Smoke Developed Index 265. 1030 Series meets ICC, NFPA Class B Classification. See Bobrick Advisory Bulletin TB-73.

1030 TRIMLINE™ SERIES PRODUCT SELECTOR CHART

| Configuration | Standard Series | Optional Feature Full-Height Hardware |
|-----------------|-----------------|---------------------------------------|
| Floor-Anchored | 1031 | 1031.65 |
| Overhead-Braced | 1032 | 1032.65 |
| Ceiling-Hung | 1038 | 1038.65 |

| PRICE INDEX | Product | Price Index |
|-------------|---|-------------|
| | TrimLine P-Lam Stainless Steel-Edged | 2.3 |
| | DuraLine Phenolic/Moisture-Resistant | 2.2 |
| | Sierra Solid Color Reinforced Composite | 2.1 |
| | Designer P-Lam/Steel-Core Stiles | 1.7 |
| | Classic P-Lam/Budget-Priced | 1.0 |