



1540 Classic™ Series Budget-Priced Partitions

MOST POPULAR INSTALLATION

Overhead-Braced configuration provides strength and stability for most moderate-use installations.

Standard Features




MATERIAL

Doors, stiles and panels: 1" (25mm) finished thickness, 3-ply, 45-lb density, resin impregnated, impact-resistant particle board construction; scratch-, graffiti- and corrosion resistant plastic laminate edges and surfaces.




HARDWARE

Through-bolted hinges, door latches, door keepers, coat hooks, and mounting hardware constructed of bright-polished chrome-plated Zamak. For emergency access, door lifts from the outside; patented, one-piece, satin-finish stainless steel shoe conceals stile leveling device.

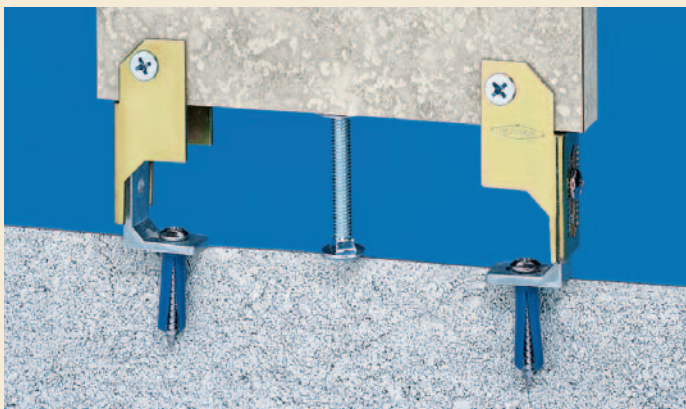

OVERHEAD-BRACED STILE BASE, LEVELING DEVICE

12-gauge, 3" x 1 1/4" (76 x 32mm) plated steel bracket attached to bottom of stile; furnished with leveling bolt, stainless steel shoe retainer, floor "L" bracket, screws and plastic anchors.

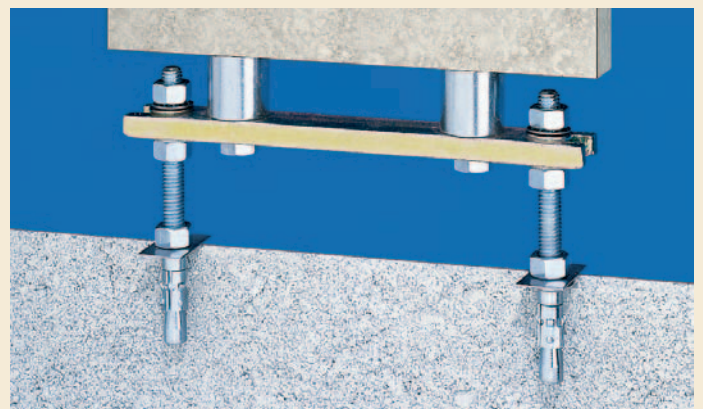

FLOOR-ANCHORED STILE BASE, LEVELING DEVICE

3/8" x 1" (10 x 25mm) steel bar, zinc-chrome plated, bolted to stile; furnished 3/8" (10mm) diameter stainless steel wedge floor anchors require minimum 2" (51mm) penetration into 3" (76mm) thick structural concrete floor.

1540 Classic™ Series Budget-Priced Toilet Partitions

Durable Plastic Laminate Surfaces

Industrial Grade Particle Board

Alternative to dent, scratch and corrosion-prone hollow-core metal partitions

Classic™ Series Engineering Resists:

Dents and impacts in moderate-use commercial, institutional and industrial washrooms.

Scratching and gouging.

Paint and marker ink. Graffiti cleans without ghosting.

Corrosion and structural failure.

Flame spread and smoke development. Has ICC, NFPA Class B ASTM E 84 test result classification.

Standard Features Summary:

Doors, stiles and panels: 1" (25mm) finished thickness.


Chrome-plated, through-bolted Zamak hardware.

Emergency access door keeper.

35 RapidResponse™ colors.

10-day order fulfillment.

Optional Features

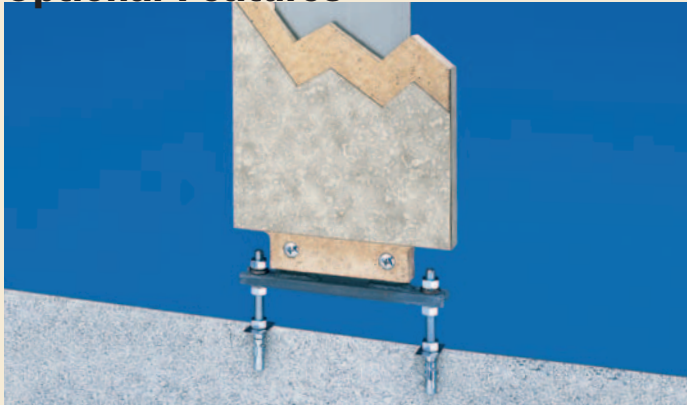

.63 OPTION STILE BASE WITH WELDED-STEEL CORE LEVELING DEVICE

All configurations. 11-gauge steel core, welded to 3/8" x 7/8" (10 x 22mm) steel bar forming a single structural unit; furnished 3/8" (10mm) diameter, stainless steel wedge floor anchors require minimum 2" (51mm) penetration into minimum 3" (76mm) thick structural concrete floor. To specify, add .63 suffix to Series No.



.64 OPTION STAINLESS STEEL HARDWARE

All configurations. Heavy-duty, type 304 satin-finish stainless steel; cast, through-bolted mortised hinges and clothes hook; emergency access door keeper; concealed stile and panel mounting brackets; patented, one-piece, shoe conceals leveling device. To specify, add .64 suffix to Series Number.

1540 CLASSIC™ SERIES PRODUCT SELECTOR CHART

Configuration	Standard Series	Optional Features		
		Stile Base with Welded Steel Core	Stainless Steel Hardware	Stile Base with Welded Steel Core and Stainless Steel Hardware
Floor-Anchored	1541	1541.63	1541.64	1541.63/.64
Overhead-Braced	1542	1542.63	1542.64	1542.63/.64
Ceiling-Hung	1548	1548.63	1548.64	1548.63/.64



OCCUPANCY INDICATOR DOOR LATCH

Through-the-door stainless steel construction with red-green occupancy indicator, and emergency access feature. Available on special order.

DESIGNER'S NOTE:

Per ASTM E 84 Tests: 1540 Series, Flame Spread Index 60, Smoke Developed Index, 300. 1540 Series meets ICC, NFPA Class B Classification. See Bobrick Advisory Bulletin TB-73.

Note: Classic™ Series toilet partitions are not designed for high-traffic or vandal-prone environments. Sierra™ Series and DuraLine™ Series vandal-resistant partitions are recommended for washrooms subject to heavy use and abuse.

PRICE INDEX		
	TrimLine P-Lam Stainless Steel-Edged	2.3
	DuraLine Phenolic/Moisture-Resistant	2.2
	Sierra Solid Color Reinforced Composite	2.1
	Designer P-Lam/Steel-Core Stiles	1.7
	Classic P-Lam/Budget-Priced	1.0