



Bobrick exclusive: Eclipse™ Dryers

Warm Air Hand/Hair Dryers from The Dryer Company.™

Choose from a comprehensive line of models designed and engineered for all building types and washroom environment needs, including vandal-resistant requirements. Save up to 95% over paper towel usage, plus additional maintenance cost savings. All dryers are UL and c-UL listed.

Price index comparisons help you specify to your project's budget criteria.

The Price Index column will assist you in your selection as you compare cover materials and vandal-resistant features appropriate for your project. Bobrick's B-708 AirGuard™ is the industry standard for vitreous enamel on cast iron construction and therefore has an index of 1.0. The B-740 offers excellent durability and design distinction with an index of 0.7, while Bobrick's flagship AirCRAFT® Series begins with an index of 1.4.

AUTOMATIC HAND DRYERS

Model	Mounting	Cover Materials	Color	Cycle	Electrical Specs	Limited Warranty	Price Index
⚡ B-7507	AirCRAFT	Recessed	Vitreous Enamel, Cast Iron	Sensor	1	10 years	1.8
⚡ B-750	AirCRAFT	Recessed	Vitreous Enamel, Cast Iron	Sensor	1	10 years	1.7
⚡ B-7007	AirCRAFT	Surface	Vitreous Enamel, Cast Iron	Sensor	1	10 years	1.6
⚡ B-700	AirCRAFT	Surface	Vitreous Enamel, Cast Iron	Sensor	1	10 years	1.5
⚡ B-748	Eclipse	Surface	Drawn Steel	Sensor	4	10 years	1.2
⚡ B-708	AirGuard	Surface	Vitreous Enamel, Cast Iron	Sensor	1	10 years	1.0
⚡ B-709	AirPro	Surface	Painted, Cast Aluminum	Sensor	1	5 years	0.9
⚡ B-740	Eclipse	Surface	Vitreous Enamel, Drawn Steel	Sensor	4	10 years	0.7
⚡ B-710	Compac	Surface	Molded Plastic	Sensor	3	1 year	0.5
⚡ B-705	Cub	Surface	Molded Plastic	Sensor	2	1 year	0.4

TOUCH BUTTON HAIR DRYERS


B-731	AirCRAFT	Surface	Vitreous Enamel, Cast Iron	White	80 Sec.	1	10 years	1.4
-------	----------	---------	----------------------------	-------	---------	---	----------	-----

ELECTRICAL SPECIFICATIONS


Key Model(s)	Key Model(s)
<p>1. B-700 B-731 B-7007 B-750 ⚡ 115V AC, 20 Amp, 2300 Watts, 50/60 Hz, or B-708 B-7507 ⚡ 208-240V AC, 9-10 Amp, 1900-2300 Watts, 50/60 Hz B-709 AirCRAFT®, AirGuard™ and AirPro™ dryers are also VDE approved and CE marked.</p>	<p>2. B-705 ⚡ 115V AC, 9 Amp, 1035 Watts, 60 Hz 3. B-710 ⚡ 115V AC, 15 Amp, 1725 Watts, 60 Hz 4. B-740 B-748 ⚡ 115V AC, 20 Amp, 2300 Watts, 50/60 Hz, or ⚡ 208-240V AC, 9-10 Amp, 1900-2300 Watts, 50/60 Hz. Eclipse Dryers are also VDE approved and CE marked.</p>

HOW TO ORDER: Specify voltage by adding 115V or 230V following model number. Example, B-700 115V.


Note: Models B-705 Cub and B-710 Compac dryers are not designed for vandal-prone installations. For vandal-prone installations, use Bobrick AirCRAFT and B-708 AirGuard dryers with cast-iron vitreous enamel finished covers, or B-740 Eclipse dryer with drawn steel, vitreous enamel finished cover.




Recessed AirCRAFT Dryers




Surface-Mounted AirCRAFT Dryers




Surface-Mounted B-705 Cub



Surface-Mounted B-708 AirGuard, B-709 AirPro



Surface-Mounted B-710 Compac



Surface-Mounted B-740, B-748 Eclipse

Rough Wall Opening:
13 3/4" (350mm) wide
9 1/2" (240mm) high
3 3/4" (95mm) deep

INSTALLATION NOTE

Bobrick automatic hand dryers should be installed 15" (380mm) above any projection or horizontal surface which may interfere with the operation of the automatic sensor.



B-740 ECLIPSE™ HAND DRYER.
Contemporary styling; durable, drawn steel white vitreous enamel cover.



B-748 ECLIPSE™ HAND DRYER.
Contemporary styling, durable, drawn steel bright-polished chrome-plated cover.



B-750, B-7507 ADA/BARRIER-FREE COMPLIANT AIRCRAFT® HAND DRYERS.
Cast-iron with vitreous enamel finish. B-750 shown.



B-700, B-7007 AIRCRAFT® HAND DRYERS.
B-731 AIRCRAFT® HAIR DRYER. Cast-iron with vitreous enamel finish. B-700 shown.



B-708 AIRGUARD™ HAND DRYER.
Durable cast-iron with white vitreous enamel cover.



B-709 AIRPRO™ HAND DRYER.
Durable cast aluminum white painted cover.



B-710 COMPACDRYER™ Contemporary styling. Hand dryer with one-piece grey-molded cover.



B-705 CUB™ HAND DRYER. One-piece white-molded cover.

WARRANTIES


For product warranties and limitations information, see page 4.

BARRIER-FREE WASHROOM GUIDELINES

WARM-AIR HAND DRYERS. Start buttons should be operable with one hand and with no more than 5 pounds of force (22.2 N), and they should protrude and be a contrasting color from surrounding material so visually impaired people can see them well and blind people can feel them easily; otherwise, provide automatic dryers with no-touch operation. When a single dryer is installed in a washroom, it is recommended that the bottom of the dryer or the start button on Model B-731 be located 38" to 40" (965–1220mm) above the finish floor, with at least 30" x 48" (760 x 1220mm) of clear floor space centered in front of the unit to allow both left- and right-hand wheelchair approaches. When two or more dryers are installed, mount one dryer so the bottom of the dryer or the start button of Model B-731 is 38" to 40" (965–1220mm) above the finish floor and locate others at 41" to 48" (1040–1220mm), and alternate left- and right-hand approaches.

- **11 styling, performance and pricing choices.**
- **Six distinctive design concepts.**
- **Five cover materials/finishes.**
- **Five vandal-resistance levels.**
- **Five electronic platforms.**
- **No-touch operation improves hygiene.**
- **Environmentally responsible.**
- **Eliminates paper costs, vandalism and expensive waste disposal.**
- **QuickShip within two days of order.**

AIRCRAFT DRYER COLORS:

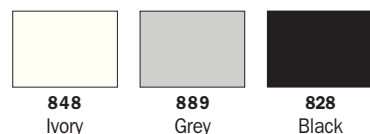

Specify color by adding color number preceded by number symbol # following voltage. Example, B-7007 115V #889. Colors are printed reproductions and are shown for descriptive purposes only.

Bobrick dryer models B-700, B-7007, B-705, B-710, B-731, B-740, B-748, B-750, and B-7507 are patented.