

B-822 Series Lavatory-Mounted Soap Dispensers



TOP-FILLING SOAP DISPENSERS

- For ease of maintenance and labor savings.
- Vandal-resistant locking cover and free-turning spout.
- Corrosion-resistant.
- Bright polished spout, cover and escutcheon.
- High-impact-resistant ABS body and shank.
- Shatter-resistant polyethylene container.
- Patented design.

FOR DISPENSING LIQUID & LOTION SOAPS, AND SYNTHETIC DETERGENTS

| Stainless Steel | Model Number Brass Finish | Capacity | Spout Length | Maximum Mounting Thickness | |
|-----------------|------------------------------|----------------|------------------|----------------------------|------------|
| ⚡ | B-822 | B-8225 | 34-fl oz (1.0-L) | 4" (100mm) | 4" (100mm) |
| ⚡ | B-8221 | N/A | 20-fl oz (0.6-L) | 4" (100mm) | 1" (25mm) |
| ⚡ | B-8226 | B-82265 | 34-fl oz (1.0-L) | 6" (150mm) | 4" (100mm) |
| ⚡ | B-82216 | N/A | 20-fl oz (0.6-L) | 6" (150mm) | 1" (25mm) |

IMPORTANT NOTE

All Bobrick B-822 Series Soap Dispensers are designed to dispense commercially marketed all-purpose hand soaps including liquid and lotion soaps, synthetic detergents, and antibacterial soaps containing PCMX and/or Triclosan. Bobrick soap dispensers are not designed to dispense alcohol-based hand sanitizers or iodine-based surgical soaps.

DESIGNER'S NOTE

1. Mount through 1" (25mm) diameter hole in lavatory or countertop.
2. Diameter of escutcheon: 2 1/16" (50mm).
3. Maximum height from base of body to bottom of container: 14 7/8" (370mm) for B-822, B-8225, B-8226, B-82265; 8 1/4" (210mm) for B-8221, B-82216. Allow clearance below basin for 3 1/2" (90mm) diameter container.
4. Mount so end of spout extends over inner edge of bowl.

B-826 Automatic Lavatory-Mounted Soap Dispenser

NEW



Automatic touch-free sensor eliminates cross contamination. Meets Barrier-Free accessibility standards. Sensor detects user's hand to automatically dispense controlled amount (0.8ml) of soap; activation range is 4" (100mm) from sensor lens. Reduces soap usage, waste. Bright Polished chrome spout cover. Dispenses 1000 handwashes per 800ml, 2000 handwashes per

1600ml OneShot® soap refills. Soap refills available from sanitary supply distributors. Red LED light blinks when soap refill is low. Yellow LED light blinks when battery life is low (average battery life 100 soap refills or 2 years). Water-resistant battery compartment and motor housing. Mounts through 1" (25mm)

diameter hole in lavatory or countertop. Maximum countertop mounting thickness 2" (50mm). Spacer for use with lavatory rim 3/4" (19mm) or greater is included. Battery requirements: 4 Alkaline D Cells (not included).

DESIGNER'S NOTES

1. Maximum height from base of soap dispenser body to bottom of soap refill 14 7/8" (380mm) for 800ml refill; 16 5/8" (420mm) for 1600ml refill.
2. Allow 5" (125mm) diameter clearance below lavatory or countertop for motor housing and 800ml soap refill. For 1600ml refill allow 5 1/2" (140mm) diameter clearance.
3. Battery compartment equipped with 36" (915mm) cord, mounts on wall under lavatory or countertop.

Available on special order:
All metal soap dispenser for vandal-prone installations.
AC Adapter (6V) for up to four B-826 Automatic Lavatory-Mounted Soap Dispensers.




B-826.18 STARTER KIT
Includes B-826 Automatic Lavatory-Mounted Soap Dispenser, an 800ml lotion soap refill, and 4 Alkaline D Cell batteries.

826-20 AC ADAPTER (6V) for one B-826 Automatic Lavatory-Mounted Soap Dispenser.

OneShot is a registered trademark of Technical Concepts LLC.


Recessed




B-4063 CONTURA SERIES SOAP DISPENSER Corrosion-resistant valve dispenses commercially marketed all-purpose hand soaps. Front of dispenser drawn, 20-gauge (1.0mm), one-piece, satin-finish stainless steel with covered, plastic soap vessel attached to back. Capacity: 50-fl oz (1.5-L). Pulls out for filling and maintenance. Concealed locking device. Vandal-resistant. Soap refill window. Wall to pushbutton, 1 5/8" (40mm). Rough Wall Opening: 5 7/8" W, 5 1/2" H, 4" min. depth (150 x 140 x 102mm). Universal/Barrier-Free Mtg. Ht.: 49" (1245mm) to top of unit with pushbutton 44" (1120mm) above floor. Patented.



4112-79 RETROFIT ALL-PURPOSE VALVE Available for Models B-4063, B-4112, B-2111, B-2112 and B-2014. Field-replaceable corrosion-resistant valve dispenses commercially marketed all-purpose hand soaps. Valve operates with less than 5 lb of force (22.2 N). Patented.



Soap vessel swings out for filling.



B-306 TRIMLINE SERIES SOAP DISPENSER Satin-finish stainless steel. Door has 90° return, conceals flange. Enclosed plastic soap vessel on back of door swings open for easy filling. Full-length hinge and tumbler lock secure door to cabinet. Capacity: 45-fl oz (1.3-L). Corrosion-resistant valve dispenses commercially marketed all-purpose hand soaps. Soap refill window. Rough Wall Opening: 8 3/8" W, 4 3/8" H, 3 7/8" min. depth (215 x 110 x 100mm). Universal/Barrier-Free Mtg. Ht.: 47 3/4" (1215mm) to top of unit with pushbutton 44" (1120mm) above floor.



2111-79 SureFlo™ RETROFIT VALVE For Models B-11, B-12, B-111, B-112, B-201, B-2014, B-2111, B-202, B-2024, B-306, B-3067; B-310, B-320 and B-330 Series Combination Units. Valve operates with less than 5 lb of force (22.2 N). Patented.

Surface Mounted



B-4063



B-4112



B-2112



B-2111

B-4112 CONTURA SERIES SOAP DISPENSER Corrosion-resistant valve dispenses commercially marketed all-purpose hand soaps. Container is satin-finish stainless steel. Capacity: 40-fl oz (1.2-L). Soap refill window. Concealed wall fastening. Hinged filler-top requires special key to open. Vandal-resistant. Unit 7" W, 6 1/8" H (180 x 155mm); wall to pushbutton, 3 9/16" (85mm). Universal/Barrier-Free Mtg. Ht.: 49" (1245mm) to top of unit with pushbutton 44" (1120mm) above floor. Patented.

B-2112 CLASSIC SERIES SOAP DISPENSER Horizontal tank is satin-finish stainless steel. Corrosion-resistant valve dispenses commercially marketed all-purpose hand soaps. Capacity: 40-fl oz (1.2-L). Soap refill window. Concealed wall fastening. Hinged filler-top requires special key to open. Vandal-resistant. Unit 8 3/8" W, 4 3/4" H (206 x 121mm); wall to pushbutton, 3 1/2" (90mm). Universal/Barrier-Free Mtg. Ht.: 47 1/2" (1205mm) to top of unit with pushbutton 44" (1120mm) above floor. Patented.

B-2111 Similar to B-2112, but with vertical tank. Universal/Barrier-Free Mtg. Ht.: 50 7/8" (1290mm) to top of unit with pushbutton 44" (1120mm) above floor.



B-2014 SOAPERSHELF® COMBINATION UNIT Soap vessel and shelf are satin-finish stainless steel. Capacity: 80-fl oz (2.4-L). Corrosion-resistant valve dispenses commercially marketed all-purpose hand soaps. Soap refill window. Unit 17 1/2" W, 3 1/8" H, 5" D (445 x 80 x 125mm); wall to pushbutton, 5 1/4" (135mm). Universal/Barrier-Free Mtg. Ht.: 46 1/2" (1180mm) to top of unit with pushbutton 44" (1120mm) above floor. Patented.

DESIGNER'S NOTES

All surface-mounted soap dispensers require 4" (100mm) minimum clearance above unit for filling; B-2014 SoaperShelf® requires 5 1/4" (135mm).

All Bobrick soap valves meet Barrier-Free standards: operable with one hand, without tight grasping, pinching, or twisting of the wrist, and with less than 5 pounds of force (22.2 N) when soap container is completely filled.

BARRIER-FREE WASHROOM GUIDELINES

SOAP DISPENSERS. Push buttons and pistons should be operable with one hand and without tight grasping, pinching, or twisting of the wrist. Activation of soap valves should not require more than 5 pounds of force (22.2 N) when unit is completely filled. If wall-mounted units are placed over lavatories or countertops, then their push-buttons should be located no more than 44" (1120mm) above the finish floor. Depending on the depth of the obstruction, the pushbuttons can be mounted as high as 48" (1220mm) for forward approach and 54" (1370mm) for side approach.

| | | |
|--------------|------------------|-----|
| PRICE | Contura™ Series | 1.8 |
| | TrimLine™ Series | 1.5 |
| INDEX | Classic™ Series | 1.0 |
| | Matrix™ Series | 0.6 |

Note: Price index is a comparison of toilet accessories for a typical washroom of popularly specified products. Product mix may affect Price Index comparisons.



B-2112



B-40



B-5050



B-40



B-42




B-155



B-156

B-132 CLASSIC SERIES SOAP DISPENSER

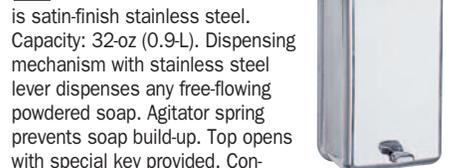

Container is satin-finish stainless steel. Capacity: 32-oz (0.9-L). Dispensing mechanism with stainless steel lever dispenses any free-flowing powdered soap. Agitator spring prevents soap build-up. Top opens with special key provided. Concealed wall fastening. Unit 4 13/16" W, 8 1/8" H (120 x 205mm); wall to lever, 3 7/8" (100mm). Universal/Barrier-Free Mtg. Ht.: 50 5/8" (1285mm) to top of unit with lever 44" (1120mm) above floor.

B-40 CLASSIC SERIES SOAP DISPENSER

Two-tone styling in black and grey. Corrosion-resistant valve dispenses commercially marketed all-purpose hand soaps. Vandal-resistant lid has unique keyless locking device. Lid pivots up after lock is disengaged for easy top filling. Large-capacity, translucent container provides visible soap level. Capacity: 40-fl oz (1.2-L). Concealed wall fastening. Unit is removable from wall for cleaning. Unit 5 13/16" W, 6 7/8" H (150 x 175mm); wall to pushbutton, 3 3/16" (80mm). Universal/Barrier-Free Mtg. Ht.: 50" (1270mm) to top of unit with pushbutton 44" (1120mm) above floor. Patented.

Same as B-40, but with all-black styling. Universal/Barrier-Free Mtg. Ht.: 50" (1270mm) to top of unit with pushbutton 44" (1120mm) above floor.

B-5050 MATRIX SERIES SOAP DISPENSER

Impact-resistant polymer; grey color. Corrosion-resistant valve dispenses commercially marketed all-purpose hand soaps. Valve removable for easy maintenance. Lid has concealed locking device. Concealed wall/mirror mounting. Large-capacity container: 50-fl oz (1.5-L). Unit 6" W, 8 3/8" H (150 x 205mm); wall to pushbutton, 4" (100mm). Universal/Barrier-Free Mtg. Ht.: 51" (1295mm) to top of unit with pushbutton 44" (1120mm) above floor. Patented.



CLASSIC SERIES LIQUIDMATE® SOAP DISPENSERS

Corrosion-resistant valve dispenses thin, free-flowing commercially marketed all-purpose hand soaps. Translucent polyethylene container provides visible soap level. 24-fl oz (0.7-L) capacity. Unit 4" W, 7 5/8" H (100 x 195mm). Universal/Barrier-Free Mtg. Ht.: 50 1/2" (1285mm) to top of unit with pushbutton 44" (1120mm) above floor.

Bright polished, chrome-plated ABS mounting bracket.

Beige ABS mounting bracket.

B-170 CLASSIC SERIES POWDERMATE® SOAP DISPENSER

Valve dispenses free-flowing powdered soap from coarse granules to fine powders. Exclusive moisture-seal valve prevents soaps from clogging. Polyethylene container with visible soap level. Capacity: 34-fl oz (1.0-L). Bright polished, chrome-plated ABS mounting bracket. Unit 4" W, 10 5/8" H (100 x 270mm). Universal/Barrier-Free Mtg. Ht.: 52 7/8" (1345mm) to top of unit with pushbutton 44" (1120mm) above floor.



B-60 SOAP DISPENSER

Ideal for high-volume applications, such as health and sports club showers. Corrosion-resistant valve dispenses commercially marketed all-purpose hand soaps. Translucent high-impact plastic container provides visible soap level and has oversized opening for quick top filling. Extra-large capacity: 1.5-gal. (5.7-L). Unit 7 3/4" W, 13" H (195 x 330mm); wall to pushbutton, 5 3/4" (145mm). Universal/Barrier-Free Mtg. Ht.: 54 3/4" (1390mm) to top of unit with pushbutton 44" (1120mm) above floor.



IMPORTANT NOTE

All Bobrick liquid soap dispensers are designed to dispense commercially marketed all-purpose hand soaps including liquid and lotion soaps, synthetic detergents, and antibacterial soaps containing PCMX and/or Triclosan. Bobrick soap dispensers are not designed to dispense alcohol-based hand sanitizers or iodine-based surgical soaps.