



Countertop

B-526 TRIMLINE SERIES PAPER TOWEL DISPENSER

Satin-finish stainless steel. Flange has 90° return. Towels load into top of dispenser. Dispenses 300 C-fold or multifold towels. Unit 12 3/4" W, 6" front to back depth (325 x 150mm); 17" (430mm) min. clearance below mounting surface is required. Rough Countertop Cutout: 12 1/4" W (310mm), 4 1/2" front to back depth (115mm), 3/4" to 1 1/2" (19 to 38mm) mounting thickness. Housing below countertop to conceal dispenser is not included. Barrier-free countertop must not exceed 34" (865mm) height, and have a clearance of at least 29" (735mm) from the bottom of the apron to the finish floor.




Recessed

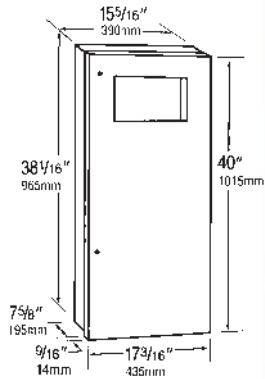


 **B-36703 TRIMLINE SERIES WASTE RECEPTACLE** Satin-finish stainless steel. Door has 90° return, conceals flange. Removable, leak-proof, 12-gal. (45.4-L) waste container. Rough Wall Opening: 16" W, 38 3/8" H, 7 3/4" min. depth (405 x 975 x 195mm). Universal/Barrier-Free Mtg. Ht.: 43 1/2" (1105mm) to top of unit.

B-367034 Similar to B-36703, but with stainless steel skirt for semi-recessing in 4" (102mm) walls.


 **B-43644 CONTURA SERIES WASTE RECEPTACLE** Satin-finish stainless steel. Removable front panel for easy cleaning. Clips secure furnished reusable vinyl liner. Capacity: 12 3/4-gal. (48.3-L). Rough Wall Opening: 15 7/8" W, 26 1/4" H, 4" min. depth (405 x 665 x 102mm). Universal/Barrier-Free Mtg. Ht.: 43–47" (1090–1195mm) to top of unit. Patented.



 **B-3644 CLASSIC SERIES WASTE RECEPTACLE** Satin-finish stainless steel. Seamless beveled flange. Removable, 12-gal. (45.4-L) receptacle locks into cabinet. Hooks hold optional vinyl liner. Rough wall opening: 16" W, 29 3/4" H, 4" min. depth (405 x 745 x 102mm). Universal/Barrier-Free Mtg. Ht.: 42–46" (1065–1170mm) to top of unit.

WASTE RECEPTACLES

LARGE-CAPACITY RECESSED WASTE RECEPTACLES

Model No.	B-43644	 B-3644
Capacity	12 3/4-gal. (48.3-L)	12-gal. (45.4-L)
Depth	9" (230mm)	8" (205mm)
Extension From Wall	5" (125mm)	4" (102mm)
Minimum Depth Rough Wall Opening	4" (102mm)	4" (102mm)

Reusable Heavy-Gauge Vinyl Liner: Order Part No. **3944-12** for above models.



Surface Mounted

B-277 CONTURA SERIES WASTE RECEPTACLE Satin-finish stainless steel. Capacity: 12 3/4-gal. (48.3-L). Top edges are hemmed and bottom of waste receptacle has recessed finger grip for safe handling. Clips secure furnished reusable vinyl liner. Unit 15 1/8" W, 23" H, 8 1/2" D (385 x 585 x 215mm). Patented.



B-279 CLASSIC SERIES WASTE RECEPTACLE Satin-finish stainless steel. Bottom edges hemmed for maximum safety. Hooks hold furnished reusable vinyl liner; removable for servicing. Capacity: 6.4-gal. (24.2-L). Unit 14" W, 18" H, 6" D (355 x 455 x 150mm).



B-5277 MATRIX SERIES WASTE RECEPTACLE Impact-resistant polymer; grey color. Capacity: 13-gal. (49.2-L). Clips secure optional vinyl liner. Unit 17" W, 23" H, 9 1/2" D (430 x 585 x 240mm). Patented.



B-275 WASTE RECEPTACLE Satin-finish stainless steel. Bottom edges hemmed for maximum safety. Hooks hold furnished reusable vinyl liner; removable for servicing. Capacity: 20-gal. (75.7-L). Unit 16 1/2" W, 23" H, 12 1/2" D (420 x 585 x 320mm).



B-261 FACIAL TISSUE WASTE RECEPTACLE Satin-finish stainless steel. Bottom edges hemmed for maximum safety. Capacity: 1 1/2-gal. (5.7-L). 10 1/2" (265mm) W at top, 8 5/8" (220mm) W at bottom. Unit 9" H, 4 3/8" D (230 x 110mm).



Floor Standing



B-2250



B-2280

B-2250 SWING-TOP WASTE RECEPTACLE Satin-finish stainless steel. Top with self-closing doors. Vinyl wall bumper, rubber feet. Hooks for liners. Capacity: 13-gal. (49.2-L). Unit 12 1/2" x 12 1/2" (320 x 320mm) at top, 29 1/2" (750mm) high.

B-2270 Similar to B-2250, but with 21-gal. (79.5-L) capacity. Unit 14" x 14" (355 x 355mm) at top, 37 1/2" (955mm) high.

B-2260 OPEN-TOP WASTE RECEPTACLE Satin-finish stainless steel. Vinyl wall bumper, rubber feet. Hooks for liners. Capacity: 13-gal. (49.2-L). Unit 12 1/2" x 12 1/2" (320 x 320mm) at top, 22" (560mm) high.

B-2280 Similar to B-2260, but with 21-gal. (79.5-L) capacity. Unit 14" x 14" (355 x 355mm) at top, 30" (760mm) high.

B-2400 LARGE-CAPACITY WASTE RECEPTACLE Satin-finish stainless steel. Removable funnel top with 8 1/4" (210mm) dia. opening for hygienic, no-touch disposal of waste. Four heavy-duty rubber feet. Galvanized-steel waste container has handle for easy removal. Capacity: 33-gal. (125-L). Unit 18 1/4" dia., 32" high (465 x 815mm).



B-2300 OPEN-TOP WASTE RECEPTACLE Satin-finish stainless steel with black steel dome-top. 6" (150mm) dia. opening for hygienic, no-touch disposal of waste. Removable, galvanized steel waste container. Capacity: 15-gal. (56.8-L). Unit 15" dia., 34" H (380 x 865mm).



Countertop



B-529 CIRCULAR WASTE CHUTE Rolled flange and exposed surfaces bright-polished stainless steel. Outside diameter 6 1/16" (175mm), inside diameter 5 1/2" (140mm), chute depth 5" (130mm). Rough Countertop Cutout: 5 5/8" diameter (140mm). Provides waste deposit access to receptacle (not furnished) placed under countertop. Universal/Barrier-Free: countertop must not exceed 34" (865mm) height and have a clearance of at least 29" (735mm) from the bottom of the apron to the finish floor.

Surface Mounted



B-278 SMALL-CAPACITY WALL URN Satin-finish stainless steel. For installation between urinals, alongside countertops in washrooms, or in other areas where space is limited. Unit 7 1/2" W, 2 3/4" H, 3 7/8" D (190 x 70 x 100mm). Wall plate is 3 3/4" (95mm) high. Universal/Barrier-Free Mtg. Ht.: 39-49" (990-1245mm) to top of unit.



B-240 STAINLESS STEEL ASHTRAY Satin-finish stainless steel. For installation in washrooms above countertops, in toilet compartments, and alongside urinals. Can also be mounted in hallway and lobby areas where space is limited. Ashtray flips over for emptying without removal from frame. Unit 5" W, 1 1/2" H, 3 1/8" D (125 x 40 x 100mm). Universal/Barrier-Free Mtg. Ht.: 38-48" (965-1220mm) to top of unit.

BARRIER-FREE WASHROOM GUIDELINES

WASTE RECEPTACLES. Access to receptacle openings should be 15" to 48" (380-1220mm) above the finish floor to allow forward and side reach by people in wheelchairs. Hinged panels covering waste receptacle openings should not require more than 5 pounds of force (22.2 N) to open. It is recommended that units projecting more than 4" (100mm) from the wall be located in corners, alcoves, or between other protruding structural elements so as not to be a hazard to blind people or interfere with required access aisles and 60" (1525mm) minimum diameter turning spaces for wheelchairs.

BARRIER-FREE DESIGN GUIDELINES

ASHTRAYS AND WALL URNS. It is recommended that all floor-standing and surface-mounted units projecting more than 4" (100mm) from the wall be located in corners, alcoves, or between other protruding structural elements so as not to be a hazard to blind people or interfere with required access aisles and 60" (1525mm) min. diameter turning space for wheelchairs. Surface-mounted units should not be located above grab bars. Ashtrays and waste receptacle openings should be located 15" to 48" (380-1220mm) above the finish floor to allow forward reach by people in wheelchairs.

REUSABLE HEAVY-GAUGE VINYL LINERS

Order Part No.:	For Model No.:
2250-3	B-2250, B-2260
2270-3	B-2270, B-2280
275-14	B-275
279-14	B-279
3944-12	B-277
5277-12	B-5277