

Surface Mounted



B-7680 CLASSIC SERIES SOAP DISH Drawn, one-piece soap dish welded to support arm and flange. Two ridges to support bar of soap and two drain holes. Bright polished stainless steel. Unit 4 1/4" W, 2" H (110 x 50mm); projects 4 1/8" (105mm) from wall.

B-76807 Similar to B-7680, but with satin finish.

B-680 SOAP DISH Similar to B-7680, but unit 4 1/2" W, 2" H (115 x 50mm); projects 3 3/8" (85mm) from wall.

B-6807 Similar to B-680, but with satin finish.



B-7679 CLASSIC SERIES TOOTHBRUSH AND TUMBLER HOLDER Drawn, one-piece holder welded to support arm and flange. 2 3/8" (60mm) diameter hole in center of unit to hold tumbler. Accommodates six toothbrushes, three on each side. Bright polished stainless steel. Unit 4 1/4" W, 2" H (110 x 50mm); projects 4 1/8" (105mm) from wall.

B-76797 Similar to B-7679, but with satin finish.

B-679 TOOTHBRUSH AND TUMBLER HOLDER Similar to B-7679, but with 2 1/4" (55mm) diameter hole in center of unit to hold tumbler. Accommodates four toothbrushes, two on each side. Unit 4 1/2" W, 2" H (115 x 50mm); projects 3 3/8" (85mm) from wall.

Bobrick 7600 Classic™ Series Accessories

- Selection of design-integrated accessories and finishes assist the specifier for all lodging types.
- Smooth, easy-to-clean gap-free design.
- Unique mounting system supports upward and downward force.
- All accessories type 304 stainless steel.
- Available in two finishes: satin or bright polished stainless steel.
- Durable all-welded construction.




B-7671
Bright polished stainless steel



B-76717
Satin-finish stainless steel

To specify bright polished stainless steel, use model number shown in catalog. To specify satin-finish stainless steel, add suffix 7 to model number shown. Examples: For **B-7671** Single Robe Hook in bright polished stainless steel, specify **B-7671**; for Single Robe Hook in satin-finish stainless steel, specify **B-76717**.

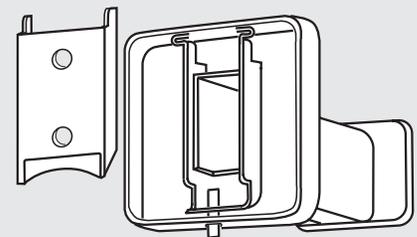

CONCEALED MOUNTING BRACKET
Unique 2-piece mounting system. Concealed mounting bracket of 18-gauge (1.2mm) stainless steel, welded inside each flange, mounts on 19-gauge (1.0mm) stainless steel wall plate. Includes a stainless steel locking setscrew on bottom.



B-681 SOAP DISH AND BAR Drawn, one-piece soap dish welded to support arm and flange. Two ridges to support bar of soap and two drain holes. $\frac{3}{4}$ " (19mm) square bar 8 $\frac{1}{2}$ " (215mm) long. Bright polished stainless steel. Unit 12" W, 2" H (305 x 50mm); projects 3 $\frac{3}{8}$ " (85mm) from wall.



B-973 VANDAL-RESISTANT SOAP DISH Extra-heavy, chrome-plated cast bronze. Bright polished finish. All edges are rounded for safety. Furnished with tamper-resistant mounting screws. Unit 5" W, 1 $\frac{3}{8}$ " H, 3" D (125 x 45 x 75mm).



B-687 DOOR BUMPER Flange is 2" x 2" (50 x 50mm). Bright polished stainless steel. Black nylon post with black neoprene bumper. Projects 2 $\frac{1}{8}$ " (55mm) from wall.



B-7676 CLASSIC SERIES TOWEL SHELF WITH TOWEL BAR Shelf 6 $\frac{1}{4}$ " (160mm) wide, consists of four $\frac{3}{8}$ " (10mm) round tubes mounted in support arms. $\frac{1}{4}$ " (6mm) round towel bar below shelf. Bright polished stainless steel. 24" length (610mm). Overall height is 4 $\frac{1}{4}$ " (110mm). Projects 8 $\frac{1}{4}$ " (210mm) from wall.

B-76767 Similar to B-7676, but with satin finish.

B-676 TOWEL SHELF WITH TOWEL BAR Similar to B-7676. Shelf 6 $\frac{1}{4}$ " (160mm) wide, consists of four $\frac{5}{16}$ " (8mm) square tubes firmly mounted in support arms. $\frac{5}{16}$ " (8mm) square towel bar below shelf. 24" length (610mm). Projects 8 $\frac{1}{2}$ " (215mm) from wall.



B-683 TOILETRY SHELF Bright polished stainless steel. 24" length (610mm). Shelf 4 $\frac{3}{4}$ " (120mm) wide, projects 5 $\frac{7}{8}$ " (145mm) from wall. Edges are roll-formed for safety.



B-7673 CLASSIC SERIES TOWEL BAR $\frac{3}{4}$ " (19mm) square towel bar. Bright polished stainless steel. Available in 18" and 24" lengths (455, 610mm). Projects 3 $\frac{1}{4}$ " (85mm) from wall.

B-76737 Similar to B-7673, but with satin finish.

B-673 TOWEL BAR Similar to B-7673. Available in 18" and 24" lengths (455, 610mm).

B-6737 Similar to B-673, but with satin finish. 24" length (610mm).



B-7674 CLASSIC SERIES TOWEL BAR Round $\frac{3}{4}$ " (19mm) diameter towel bar. Bright polished stainless steel. Available in 18" and 24" lengths (455, 610mm). Projects 3 $\frac{1}{4}$ " (85mm) from wall.

B-76747 Similar to B-7674, but with satin finish.

B-674 TOWEL BAR Similar to B-7674. Available in 18" and 24" lengths (455, 610mm).

B-6747 Similar to B-674, but with satin finish. 24" length (610mm).



B-205 HEAVY-DUTY TOWEL BAR 1" (25mm) dia. bar is 20-gauge (0.9mm), type 304 stainless steel, satin finish. Support posts are heavy brass with satin chrome finish. Flanges are 2 $\frac{3}{4}$ " (70mm) diameter. Withstands more than 250-lb (113-kg) downward pull when properly installed. Bar cannot turn in posts. Available in 18" and 24" lengths (455, 610mm).



B-530 EXTRA-HEAVY-DUTY TOWEL BAR For use in hospital and hotel bathrooms. 1" (25mm) diameter bar is 18-gauge (1.2mm), type 304 stainless steel, satin finish. Concealed mounting with snap flange. Withstands 900-lb (408-kg) downward pull when properly installed. Available in 18" and 24" Lengths (455, 610mm).



B-550 EXTRA-HEAVY-DUTY TOWEL BAR 1 $\frac{1}{4}$ " (30mm) dia. bar has peened grip with bright polished ends and flanges. 18-gauge (1.2mm), type 304 stainless steel. Concealed mounting with snap flange. Withstands 900-lb (408-kg) downward pull when properly installed. Available in 24", 30", 36", and 42" (610, 760, 915, 1065mm) lengths.

DESIGNER'S NOTES

A complete selection of recessed and surface-mounted, single- and double-roll, stainless steel toilet tissue dispensers is shown on pages 32 and 33.

For added safety in hospital and hotel bathrooms, grab bars are recommended for use as towel bars.

BARRIER-FREE BATHROOM GUIDELINES

It is recommended that surface-mounted bathroom accessories be mounted 38" to 48" (965–1220mm) above the finish floor. Soap Dishes should be placed on the same wall as the shower head and controls where they are least likely to collect standing water. Over bathtubs, Soap Dishes should be mounted between the grab bar and the rim of bathtubs.

PRICE INDEX	600 Series	2.6
	7600 Series	1.0

Recessed and Surface Mounted



⚡ B-355 RECESSED FACIAL TISSUE DISPENSER

Faceplate type 304 stainless steel, satin finish. Galvanized-steel mounting cabinet. Dispenses 300 two-ply facial tissues. Unit 11 $\frac{7}{8}$ " W, 6 $\frac{1}{8}$ " H, 4" D (300 x 155 x 100mm). Rough Wall Opening: 10 $\frac{3}{4}$ " W, 5 $\frac{1}{4}$ " H, 4" min. depth (275 x 135 x 102mm).

⚡ B-3552 RECESSED FACIAL TISSUE DISPENSER

Dispenses one pack of 100 two-ply facial tissues. Faceplate type 304 stainless steel, satin finish. Galvanized-steel mounting cabinet. Unit 11 $\frac{7}{8}$ " W, 6 $\frac{1}{8}$ " H, 2 $\frac{1}{4}$ " D (300 x 155 x 55mm). Rough Wall Opening: 10 $\frac{3}{4}$ " W, 5 $\frac{1}{4}$ " H, 2 $\frac{3}{8}$ " min. depth (275 x 135 x 60mm).



⚡ B-8397 SURFACE-MOUNTED FACIAL TISSUE DISPENSER

Cabinet type 304 stainless steel, satin finish. Equipped with concealed locking device; opens with key provided. Concealed wall plate is 22-gauge (0.8mm), type 304 stainless steel. Dispenses one pack of 100 two-ply facial tissues. Unit 10 $\frac{1}{4}$ " W, 5 $\frac{3}{16}$ " H, 2 $\frac{1}{4}$ " D (260 x 130 x 55mm).

B-203 SURFACE-MOUNTED

BOTTLE OPENER One-piece, 16-gauge (1.6mm), type 304 stainless steel with satin finish. Opener projects 1" (25mm) from wall. Unit 1 $\frac{7}{8}$ " wide, 2 $\frac{1}{4}$ " high (50 x 55mm).



♿ B-398 RECESSED MEDICINE CABINET

Type 304 stainless steel, satin finish. Mirror: No. 1 Quality, $\frac{1}{4}$ " (6mm) glass electrolytically copper-plated. 15-year guarantee against silver spoilage. Door has full-length stainless steel piano-hinge, magnetic catch and cable doorstop. Four adjustable stainless steel shelves. Cabinet may be inverted for right- or left-hand door swing. Rough Wall Opening: 15 $\frac{1}{4}$ " W, 25 $\frac{1}{2}$ " H, 3 $\frac{3}{8}$ " min. depth (385 x 650 x 90mm). Av. Mtg. Ht.: 74" (1880mm) to top of unit; Barrier-Free, 66 $\frac{1}{2}$ " (1690mm).

B-299 SURFACE-MOUNTED MEDICINE CABINET

Similar to B-398. Unit 17" W, 26 $\frac{1}{8}$ " H, 5" D (430 x 685 x 130mm).

♿ B-397 RECESSED MEDICINE CABINET All-

steel cabinet with baked white enamel finish. Three adjustable plastic shelves. Mirror: No. 1 quality, $\frac{1}{4}$ " (6mm) glass electrolytically copper-plated. Door has enameled steel piano-hinge and magnetic catch. Door is 15 $\frac{1}{2}$ " W, 25 $\frac{7}{8}$ " H (405 x 655mm). Rough Wall Opening: 14" W, 23 $\frac{5}{8}$ " H, 3 $\frac{1}{2}$ " min. depth (355 x 600 x 90mm). Av. Mtg. Ht.: 73" (1855mm) to top of unit; Barrier-Free, 65 $\frac{1}{2}$ " (1665mm).


♿ B-297 SURFACE-MOUNTED MEDICINE

CABINET All-steel cabinet and two fixed shelves with baked white enamel finish. Mirror: No. 1 quality, $\frac{1}{8}$ " (3mm) glass electrolytically copper-plated. Door has enameled steel piano-hinge and magnetic catch. Door is 14 $\frac{1}{8}$ " W, 20 $\frac{1}{4}$ " H (360 x 515mm). Unit 3 $\frac{3}{4}$ " (95mm) deep. Av. Mtg. Ht.: 69" (1755mm) to top of unit; Barrier-Free, 60" (1525mm).

B-398



UNIT COMBINES adjustable shelves, mirror, used razor blade slot, and toothbrush holder.



BARRIER-FREE BATHROOM GUIDELINES

MEDICINE CABINETS. Units should be mounted so the bottom edge of the reflective surface is no higher than 40" (1015mm) above the finish floor and at least one accessible shelf is no higher than 44" (1120mm) above the finish floor.

SOAP DISHES. It is recommended that soap dishes in all bathing facilities be recessed and placed on the same wall as the shower head and controls where they are least likely to collect standing water. It is recommended that they be mounted 38" to 48" (965–1220mm) above the finish floor, or they should be mounted between the grab bar and the rim of bathtubs.

SHOWER CURTAINS. All types of shower installations designed for wheelchair users are generally more accessible when shower curtains are used as enclosures. If other types of enclosures are used, they should fold back completely out of the way so as not to obstruct transfer to shower seats or interfere with controls, and they should not incorporate a track along the rim of bathtubs.

GRAB BARS. All accessible bathing facilities require grab bars installed to meet ADAAG specifications. Diameter of grab bars should be 1 $\frac{1}{4}$ " to 1 $\frac{1}{2}$ " (32–38mm) with 1 $\frac{1}{2}$ " (38mm) clearance from the wall. Grab bars should not rotate in their fittings. The required mounting height is universally 33" to 36" (840–915mm) from the centerline of the grab bar to the finish floor. Structural strength of grab bars and their mounting devices should withstand more than 250 pounds of force (1112 N).

SHOWER SEATS. L-shaped folding shower seats are required in accessible 36" x 36" (915 x 915mm) shower stalls. They should be mounted on the wall opposite controls with top surface of seat 17" to 19" (430–485mm) above the finish floor. Seat should have no more than 1 $\frac{1}{2}$ " (38mm) clearance from walls and should extend the depth of shower stall, allowing space for shower curtain at front of stall. Wide section of L-shaped seat should project no more than 23" (585mm) from wall; the narrow section, no more than 16" (405mm) from wall. If shower seat is provided in 30" x 60" (760 x 1525mm) min. shower stall, it should be folding type and mounted on the wall adjacent to controls. Structural strength of shower seats and their mounting devices should withstand more than 250 pounds of force (1112 N).